


8.返回主界面时，传递城市代码数据

修改更新按钮的单击事件处理程序，并编写onActivityResult函数用于接收返回的数据。

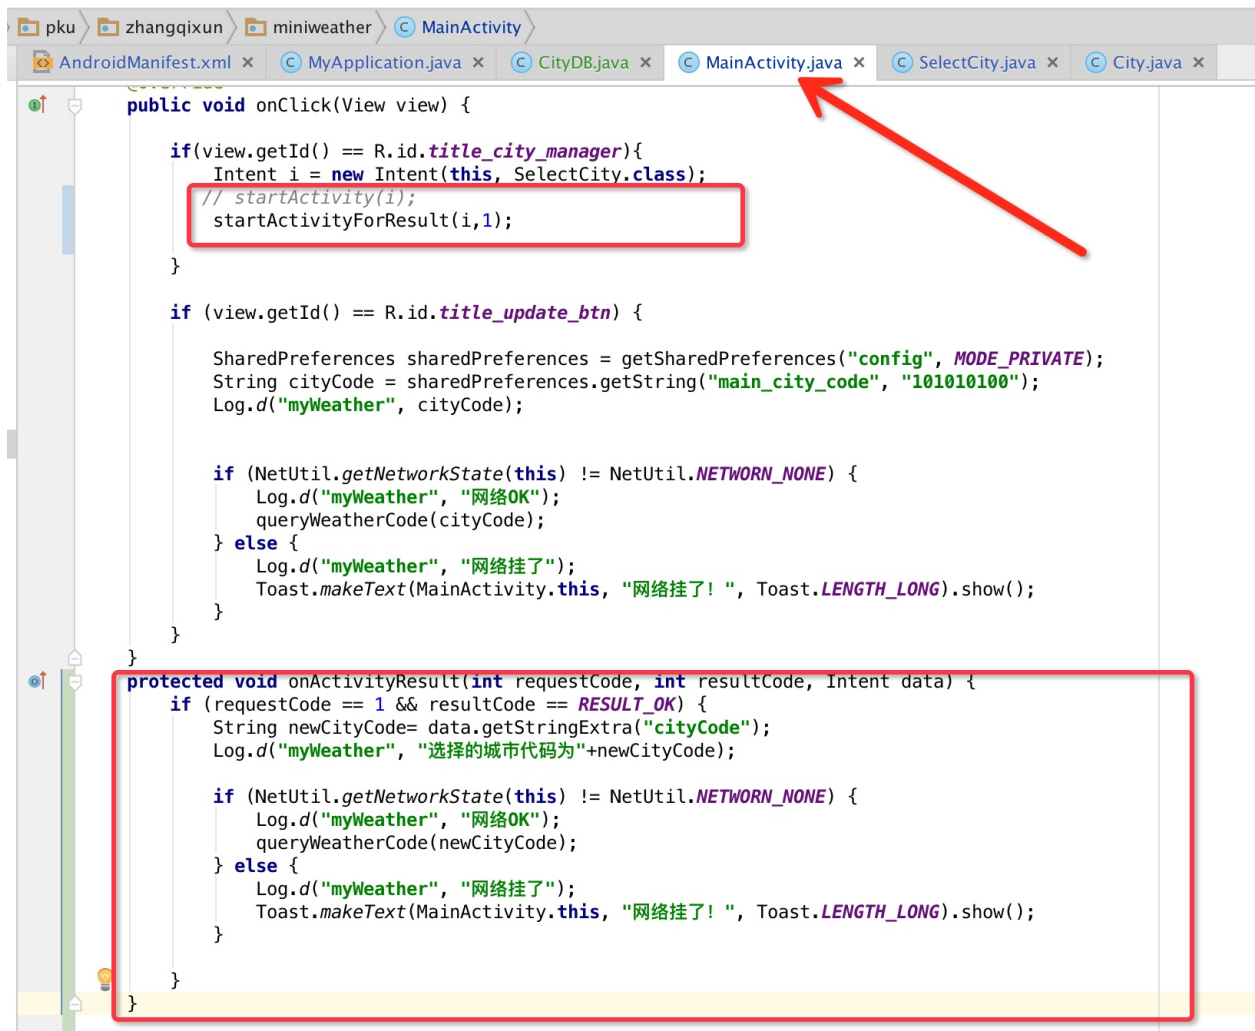


```
startActivityForResult(i,1);
```

```
protected void onActivityResult(int requestCode, int resultCode, Intent data) {
    if (requestCode == 1 && resultCode == RESULT_OK) {
        String newCityCode= data.getStringExtra("cityCode");
        Log.d("myWeather", "选择的城市代码为"+newCityCode);

        if (NetUtil.getNetworkState(this) != NetUtil.NETWORKSTATE_NONE) {
            Log.d("myWeather", "网络OK");
            queryWeatherCode(newCityCode);
        } else {
            Log.d("myWeather", "网络挂了");
            Toast.makeText(MainActivity.this, "网络挂了！", Toast.LENGTH_LONG).show();
        }
    }
}
```

在finish之前，传递数据。

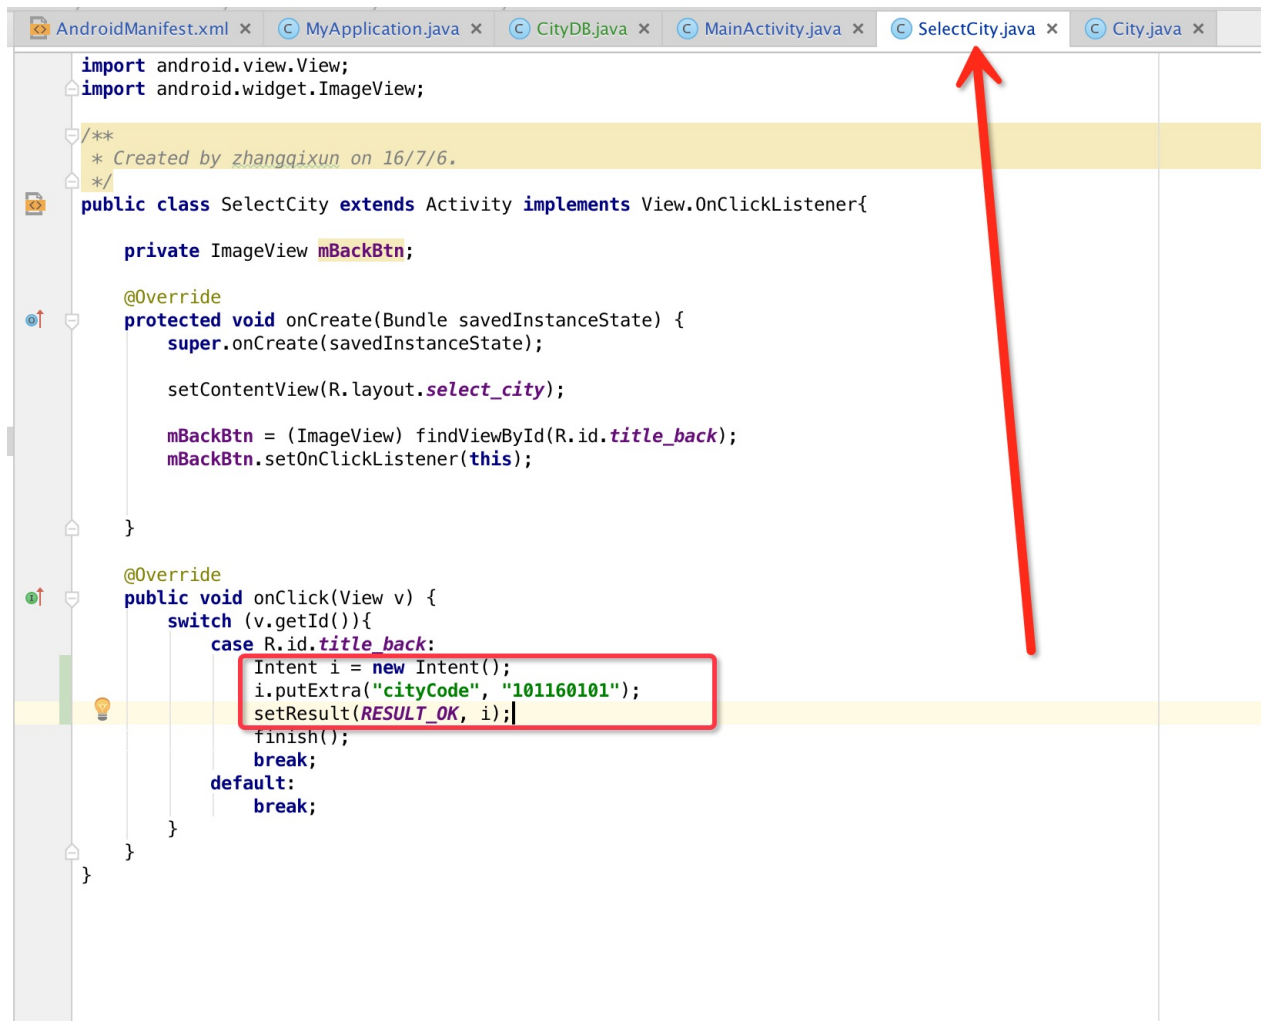

```
Intent i = new Intent();
        i.putExtra("cityCode", "101160101");
        setResult(RESULT_OK, i);
```

